

Electrolux Professional

automatic

Range Overview

Hygiene Laundry



Electrolux

Excellent versatility for immaculate hygiene

Because you can't compromise on cleanliness, we place hygiene top of the agenda. Thanks to best-in-class design and technologies, Electrolux Professional offers cost-efficient and reliable hygiene solutions combined with unparalleled flexibility.

Electrolux Excellence



Excellence is central to everything we do. By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services. Thus making our customers' work and life easier and more profitable.

Washer Extractor Control ensures the best utility cost optimisation and customising



Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on the Clarus Control®/ Clarus Control® TS panel or on your PC with the Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System

Clarus Control® TS

- ▶ Easy-to-use touch screen for Pullman barrier washers
- ▶ Fully programmable with up to 900 programs
- ▶ Delayed start with Real-time clock for next-day unloading
- ▶ Up to 13 liquid detergent signals for correct formula concentrations
- ▶ Second display option on the clean side for more cycle oversight
- ▶ Process monitoring via Certus Management™ Information System

Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in up to 18 languages, plus Real-time clock
- ▶ Process monitoring via Certus Management™ Information System
- ▶ Create custom Compass Pro® wash programs on your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ 5 liquid detergent signals for automatic dosing
- ▶ Automatic Saving System: save up to 50 % on water for half loads

Tumble Dryer Control

ensures the best flexibility and usability



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in up to 18 languages, plus Real-time clock
- ▶ Create custom Compass Pro® programs on your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ Process monitoring via Certus Management™ Information System



Selecta Control®

- ▶ Accurate temperature/humidity control for quick, efficient drying
- ▶ Automatic inversion of drum rotation
- ▶ Automatic cooling cycle reduces creasing and improves finish
- ▶ 9 programs including exact temperature control and continuous high drying performance throughout the entire electronic cycle
- ▶ Select drying time, cooling and reverse action
- ▶ Continuous self-testing, displays and logs error codes for easy troubleshooting
- ▶ Process monitoring via Certus Management™ Information System

Ironer Control

ensures the best results thanks to process optimisation



Electronic control

- ▶ Large, intuitive display
- ▶ Indicator light informs operator if retained humidity after ironing is too high
- ▶ Ensures optimum dryness and hygiene, plus compliance with risk analysis and bio-contamination quality control
- ▶ Process monitoring via Certus Management™ Information System
- ▶ All parameters are assessable via USB connection directly to your computer











Electro-mechanical control

- ▶ Easy to read and set
- ▶ Ironing temperature and speed can be adjusted at any time
- ▶ Autostop function to maximise ironing belt lifetime (standard)








Washer Extractors

Choose the solution that suits you best

<div>         </div>								
Washer Extractors Soft Mount H High Spin Range								
W555H	W565H	W575H	W5105H	W5130H	W5180H	W5240H	W5300H	
Drum volume, l	53	65	65	105	130	180	240	300
Dry weight capacity, kg/lb	6 / 13	7 / 15	7 / 15	11 / 25	14 / 30	20 / 45	27 / 60	33 / 75
G-factor	530	450	450	450	450	450	450	400
Width, mm	595	720	720	830	910	970	1020	1020
Depth, mm	681	721	721	757	821	947	990	1134
Height, mm	832	1132	1132	1212	1340	1426	1462	1462
Width, in	23 7/16"	28 3/8"	28 3/8"	32 11/16"	35 13/16"	38 3/16"	40 3/16"	40 3/16"
Depth, in	26 13/16"	28 3/8"	28 3/8"	29 13/16"	32 5/16"	37 5/16"	39"	44 5/8"
Height, in	32 3/4"	44 9/16"	44 9/16"	47 11/16"	52 3/4"	56 1/8"	57 9/16"	57 9/16"
Electric / Steam / Non-heated	x / - / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Compass Pro*	●	●	●	●	●	●	●	●
Clarus Control**	-	○	○	○	○	○	○	○
MOP Washer	○	○	○	○	○	○	○	○
SLUICE Washer	○	○	○	○	○	○	○	○
Wet-cleaning Excellence	○	○	○	○	○	○	○	○

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control* are designed with horizontal wave and meet the specifications of Generation 4000.

N Normal Spin S Super Spin							
<div>        </div>							
Washer Extractors Solid Mount N / S Spin Range							
W575N/S	W585N/S	W5105N/S	W5130N/S	W5180N/S	W5250N/S	W5330N/S	
Drum volume, l	75	85	105	130	180	250	330
Dry weight capacity, kg/lb	8 / 18	9 / 20	11 / 25	14 / 30	20 / 45	28 / 62	35 / 75
G-factor	100 / 200	100 / 200	100 / 200	100 / 200	100 / 200	100 / 200	100 / 200
Width, mm	660	660	720	720	750	830	910
Depth, mm	681	722	697	787	914	1029	1114
Height, mm	1131	1133	1217	1216	1345	1426	1465
Width, in	26"	26"	28 3/8"	28 3/8"	29 1/2"	32 11/16"	35 13/16"
Depth, in	26 13/16"	28 7/16"	27 7/16"	31"	36"	40 1/2"	43 7/8"
Height, in	44 1/2"	44 5/8"	47 15/16"	47 7/8"	52 15/16"	56 1/8"	57 11/16"
Electric / Steam / Non-heated	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Compass Pro*	●	●	●	●	●	●	●
Clarus Control* (S) *	○	○	○	○	○	○	○
MOP Washer (S)	○	○	○	○	○	○	○
SLUICE Washer (N)	○	○	○	○	○	○	○
Wet-cleaning Excellence (S)	○	○	○	○	○	○	○

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control* are designed with horizontal wave and meet the specifications of Generation 4000.

Soft Mount machines
Solid Mount machines

Direct installation on all types of floors
Need to be fixed to the floor

● standard ○ option
x available - not available


Drum volume, l	130	240
Dry weight capacity, kg/lb	8 / 18	15 / 33
G-factor	350	350
Electric / Electric	●	●
Width, mm	910	1020
Depth, mm	1110	1350
Height, mm	1330	1450
Width, in	35 13/16"	40 3/16"
Depth, in	43 11/16"	53 1/8"
Height, in	52 3/8"	57 1/16"
Electric / Gas	○	○
Non-heated / Gas or Electric	○	○
Compass Pro*	●	●
Wet-cleaning Excellence	-	○



Drum volume, l	200	270	350
Dry weight capacity, kg/lb	20 / 44	27 / 60	35 / 77
G-factor	350	350	350
Width, mm	895	1050	1270
Depth, mm	1040	1050	1060
Height, mm	1620	1620	1620
Width, in	35 1/4"	41 5/16"	50"
Depth, in	40 15/16"	41 5/16"	41 3/4"
Height, in	63 3/4"	63 3/4"	63 3/4"
Electric / Steam / Gas	x / x / x	x / x / x	x / x / x
Compass Pro*	●	●	●
Wet-cleaning Excellence	○	○	○



Drum volume, l	130	180	250	350	500	650	700	900	1100
Dry weight capacity, kg/lb	13 / 30	18 / 40	25 / 55	35 / 77	50 / 110	65 / 143	70 / 154	90 / 198	110 / 242
G-factor	300	300	350	350	350	350	300	300	300
Width, mm	910	970	1045	1285	1565	2000	1496	1726	1956
Depth, mm	875	975	980	980	980	980	1363	1363	1363
Height, mm	1325	1410	1610	1610	1610	1610	2040	2040	2040
Width, in	35 13/16"	38 3/16"	41 1/8"	50 9/16"	61 5/8"	78 3/4"	58 7/8"	67 15/16"	77"
Depth, in	34 7/16"	38 3/8"	38 9/16"	38 1/2"	38 9/16"	38 9/16"	53 11/16"	53 11/16"	53 11/16"
Height, in	52 3/16"	55 1/2"	63 1/2"	63 1/2"	63 3/8"	63 3/8"	80 5/16"	80 5/16"	80 5/16"
Electric / Steam / Gas / Thermal Oil	x / x / - / -	x / x / - / -	x / x / x / x	x / x / x / x	x / x / x / x	x / x / x / x	x / x / - / x	x / x / - / x	x / x / - / x
Compass Pro*	●	●	-	-	-	-	-	-	-
Clarus Control*	○	○	●	●	●	●	-	-	-
Clarus TS*	-	-	-	-	-	-	●	●	●
Wet-cleaning Excellence	○	○	○	○	○	-	-	-	-

Tumble Dryers

Find the solution that meets your needs

● standard ○ option
x available - not available



Tumble Dryers	T5130	T5190	T5250	T5290	T5350	T5550	T5675	T4900	T41200
Drum volume, l	130	190	250	290	349	550	675	900	1200
Dry weight capacity, kg / lb, Filling factor 1:18	6 / 13	10.6 / 23	13.9 / 30.7	16.1 / 35.5	19.4 / 42.8	30.5 / 67.2	37.5 / 82.7	50 / 110	66.7 / 147
Width, mm	597	721	790	713	790	961	961	1290	1290
Depth, mm	723	778	958	1210	1177	1365	1560	1295	1485
Height, mm	839	1114	1770	1688	1770	1869	1857	2465	2465
Width, in	23 7/16"	28 3/8"	31 1/8"	28 1/16"	31 1/8"	37 13/16"	37 13/16"	50 13/16"	50 13/16"
Depth, in	28 15/16"	29 5/16"	37 11/16"	47 5/8"	46 5/16"	53 3/4"	61 7/16"	51"	58 7/16"
Height, in	33 7/16"	44 1/2"	69 11/16"	66 7/16"	69 11/16"	73 9/16"	73 1/8"	97"	97"
Sliding door	-	-	-	-	-	-	-	○	○
Electric / Gas / Steam	● / - / -	x / x / -	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Energy kWh / l water evaporated* (Electric / Gas / Steam)	0.94 / - / -	0.92 / - / -	0.95 / 1.09 / 2.23	0.96 / 1.06 / 1.37	0.98 / 1.06 / 1.22	0.98 / 1.06 / 1.22	0.98 / 1.07 / 1.26	1.2 / 1.16 / 1.91	1.17** / 1.23 / 1.64
Selecta Control®	-	-	-	-	-	-	-	●	●
Compass Pro®	●	●	●	●	●	●	●	-	-
Residual Moisture Control	●	○	○	○	○	○	○	●	●
Reversing Drum Action	●	●	○	○	○	○	○	●	●
Wet-cleaning Excellence	○	○	○	○	○	○	○	○	○

Front and side panel in stainless steel as option. More information on product data sheet.

* At rated capacity 100 % cotton load at 50 % initial moisture dried to 0 %

** Test load 48 kg / 100 lbs

Images shown are a representation of the product only and variations may occur. See details on product data sheet.









Ironers

Discover which solution is best for you

● standard ○ option
x available – not available

<div>    </div>										
Ironers	IC43316	IC43320	IC44819	IC44821	IC44825	IC44828	IC44832	IC44819 FFS	IC44825 FFS	IC44832 FFS
Roll diameter, mm/in	325 / 13	325 / 13	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19
Ironing width, mm/in	1650 / 65	2065 / 81	1910 / 75	2120 / 83	2540 / 100	2750 / 108	3170 / 125	1910 / 75	2540 / 100	3170 / 125
Width, mm	2030	2445	2575	2785	3205	3205	3835	3555	4185	4815
Depth, mm	690	690	1070	1070	1070	1070	1070	1820	1820	1820
Height, mm	1145	1145	1270	1270	1270	1270	1270	1590	1590	1590
Width, in	79 15/16*	96 1/4*	101 3/8*	109 5/8*	126 3/16	126 3/16*	151*	139 15/16*	164 3/4*	189 9/16*
Depth, in	27 3/16*	27 3/16*	42 1/8*	42 1/8*	42 1/8*	42 1/8*	42 1/8*	71 5/8*	71 5/8*	71 5/8*
Height, in	45 1/16*	45 1/16*	50*	50*	50*	50*	50*	62 5/8*	62 5/8*	62 5/8*
Width, mm (with Feeding and Length Folding)	–	–	2575	2785	3205	3205	3835	–	–	–
Depth, mm (with Feeding and Length Folding)	–	–	1280	1280	1280	1280	1280	–	–	–
Height, mm (with Feeding and Length Folding)	–	–	1460	1460	1460	1460	1460	–	–	–
Width, in (with Feeding and Length Folding)	–	–	101 3/8*	109 5/8*	126 3/16*	126 3/16*	151*	–	–	–
Depth, in (with Feeding and Length Folding)	–	–	50 3/8*	50 3/8*	50 3/8*	50 3/8*	50 3/8*	–	–	–
Height, in (with Feeding and Length Folding)	–	–	57 1/2*	57 1/2*	57 1/2*	57 1/2*	57 1/2*	–	–	–
Electric / Steam / Gas	x / x / –	x / x / –	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Evaporation capacity, l/h	19.5	24.5	38 / 57 / 35	40 / 63 / 37	48 / 75 / 46	51 / 81 / 51	59 / 93 / 59	38 / 57 / 35	48 / 75 / 46	59 / 93 / 59
Speed, m/minute	0.5 to 5.5	0.5 to 5.5	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 11	1.5 to 11	1.5 to 11
Ironer Moisture	○	○	●	●	●	●	●	●	●	●
Dubixium™*	–	–	○	○	○	○	○	●	●	●
Automatic feeding	–	–	○	○	○	○	○	●	●	●
Automatic folding	–	–	○	○	○	○	○	●	●	●

* For electric and gas heated versions

<div>  </div>		
Ironers	C-Flex 900	C-Flex 1200
Roll diameter, mm/in	900 / 35	1200 / 47
Ironing width, mm/in	2700 to 3500 / 106 to 138	3000 to 4200 / 118 to 165
Width x Depth x Height (1 roll), mm*	4500 x 1685 x 1560	4500 x 1985 x 1760
Width x Depth x Height (2 rolls), mm*	4500 x 2955 x 1560	4500 x 3555 x 1760
Width x Depth x Height (3 rolls), mm*	4500 x 4225 x 1560	4500 x 5125 x 1760
Width x Depth x Height (1 roll), in	177 3/16" x 66 5/16" x 61 7/16"	177 3/16" x 78 1/8" x 69 5/16"
Width x Depth x Height (2 rolls), in	177 3/16" x 116 5/16" x 61 7/16"	177 3/16" x 139 15/16" x 69 5/16"
Width x Depth x Height (3 rolls), in	177 3/16" x 166 5/16" x 61 7/16"	177 3/16" x 201 3/4" x 69 5/16"
Steam / Gas / Thermal Oil	x / x / x	x / x / x
Evaporation capacity, l/h	205 to 795	210 to 1260
Number of rolls	1 to 3	1 to 3
Speed, m/minute	4 to 51	6 to 51

* For 3.3 m working width models

Drying Cabinets

- standard

○ option

x available

- not available



Garments/hours*	70	
Loading capacity, kg/lb		6 - 8 / 12 - 18
Width, mm	870	1200
Depth, mm	1300	580
Height, mm	1975	1820
Width, in	34 1/4"	47 1/4"
Depth, in	51 3/16"	22 13/16"
Height, in	77 3/4"	71 5/8"
Electric / Gas / Steam	x / x / x	● / - / -
Microprocessor	semi-programmable	pre-fixed programs

* Estimated production power

Images shown are a representation of the product only and variations may occur. See details on product data sheet.



Finishing equipment

Finishing solutions that meet your needs

This is a selection of our key finishing products. A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available. Ask your local office!

Table



FIT2WC Ironing Table

Presses

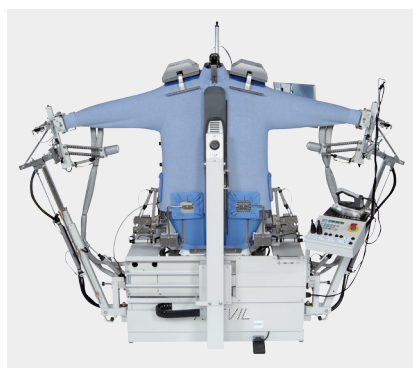


FPA6-WC Collar and Cuff Press



FPA3-D Leg Shape Press

Finisher



FSF2 Blowing Shirt Finisher



FSF3 Pressing Shirt Finisher



FFT-S Form Finisher

Spotting unit



FTT2 Trouser Topper



FFT-WC Jacket Multiform Finisher



FSU1 Spotting Table

Unique Service Excellence

Always near.
Always there for you

A reliable, global presence: Electrolux Professional offers the most extensive service network of skilled, authorised partners for daily tasks: installation, spare parts and maintenance. All of them provide efficient customer service and fast technical assistance. A global service network for prompt, expert advice worldwide.

- ▶ 2,000 authorised service centres
- ▶ Over 10,000 expert technicians
- ▶ 98,000 available spare parts in stock
- ▶ Spare parts are available for at least 10 years from the end of production
- ▶ 24–48 hr spare parts delivery worldwide



Electrolux Professional Hygiene Laundry

Hygiene Laundry Solutions

In-House Laundry Solutions
Consumer-Operated Laundry Solutions
Commercial Laundry Solutions

Excellence with the environment in mind

Electrolux Professional solutions perfectly match the customers' needs, including the areas of reliability, cost efficiency and sustainability. The products are the best in terms of quality – durability with low running costs. Some installations have been running for more than 40 years!

- ▶ All Electrolux factories are ISO 14001-certified
- ▶ All Electrolux Professional products are designed for low water, energy and detergent consumption, and for low emissions into the environment
- ▶ All Electrolux Professional products are ROHS-compliant and over 95 % recyclable
- ▶ All units are quality tested, piece by piece, and all of the functions are individually checked by expert technicians
- ▶ In the last five years, more than 70 % of Electrolux Professional solutions have been updated with features that are always designed with the needs of customers and environmental considerations in mind



Discover the Electrolux Excellence
and share more of our thinking at
www.electrolux.com/professional