

Electrolux Professional



Range Overview

Hospitality
Laundry



Electrolux

Excellent solutions for cost savings and reliability

Boasting intelligent features and unique extras, our excellent solutions offer the utmost in quality combined with the lowest utility costs for in-house laundries of all sizes. For total control of your laundry costs.

Electrolux Excellence



Excellence is central to everything we do. By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services. Thus making our customers' work and life easier and more profitable.

Washer Extractor Control ensures the best utility cost optimisation and customising




Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on Clarus Control® panel or on your PC with Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals, plus accurate detergent dosing via connection to Efficient Dosing System
- ▶ Process monitoring via Certus Management™ Information System



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Process monitoring via Certus Management™ Information System



Unique Triangle Technology

The best flexibility and process performance

- ▶ **Economy:** optimal cost efficiency for medium-soiled garments due to low energy consumption
- ▶ **Time:** the highest output volume for lightly-soiled garments due to shorter process times
- ▶ **Performance:** the best cleaning results for heavily-soiled garments


Tumble Dryer Control

ensures the best flexibility and usability



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 self programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Process monitoring via Certus Management™ Information System



Unique Triangle Technology

The best flexibility and process performance

- ▶ **Economy:** optimum cost-effectiveness due to low energy consumption
- ▶ **Time:** the highest output due to short process time
- ▶ **Care:** the best drying results



Selecta Control®

- ▶ Accurate temperature/humidity control for quick, efficient drying
- ▶ Automatic inversion of drum rotation
- ▶ Automatic cooling cycle reduces creasing and improves finish
- ▶ 9 programs, including for entire electronic cycle, exact temperature control and constantly high drying performance
- ▶ Select drying time, cooling and reverse action
- ▶ Continuous self-testing, displays and logs error codes for easy troubleshooting
- ▶ Process monitoring via Certus Management™ Information System

Ironer Control

ensures the best results thanks to process optimisation



Electronic control

- ▶ Large, intuitive display
- ▶ Indicator light informs operator if retained humidity after ironing is too high
- ▶ Ensures optimum dryness and hygiene, plus compliance with risk analysis and bio-contamination quality control
- ▶ Process monitoring via Certus Management™ Information System



Electro-mechanical control

- ▶ Easy to read and set
- ▶ Ironing temperature and speed can be adjusted at any time
- ▶ Autostop function to maximise ironing belt lifetime (standard)

Washer Extractors

Choose the solution that suits you best

● standard ○ option
x available - not available



| | W555H | W565H | W575H | W5105H | W5130H | W5180H | W5240H | W5300H |
|-------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Drum volume, l | 53 | 65 | 65 | 105 | 130 | 180 | 240 | 300 |
| Dry weight capacity, kg/lb | 6/13 | 7/15 | 7/15 | 11/25 | 14/30 | 20/45 | 27/60 | 33/75 |
| G-factor | 530 | 450 | 450 | 450 | 450 | 450 | 450 | 400 |
| Width, mm | 595 | 720 | 720 | 830 | 910 | 970 | 1020 | 1020 |
| Depth, mm | 681 | 721 | 721 | 757 | 821 | 947 | 990 | 1134 |
| Height, mm | 832 | 1132 | 1132 | 1212 | 1340 | 1426 | 1462 | 1462 |
| Width, in | 23 7/16* | 28 3/8* | 28 3/8* | 32 11/16* | 35 13/16* | 38 3/16* | 40 3/16* | 40 3/16* |
| Depth, in | 26 13/16* | 28 3/8* | 28 3/8* | 29 13/16* | 32 5/16* | 37 5/16* | 39* | 44 5/8* |
| Height, in | 32 3/4* | 44 9/16* | 44 9/16* | 47 11/16* | 52 3/4* | 56 1/8* | 57 9/16* | 57 9/16* |
| Electric / Steam / Non-heated | x / - / x | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x |
| Compass Pro* | ● | ● | ● | ● | ● | ● | ● | ● |
| Clarus Control* * | - | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Wet-cleaning Excellence | - | - | - | ○ | ○ | ○ | ○ | ○ |

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control* are designed with horizontal wave and meet the specifications of Generation 4000.



| | W575N/S | W585N/S | W5105N/S | W5130N/S | W5180N/S | W5250N/S | W5330N/S | W5280X | W5350X | W5600X |
|-------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Drum volume, l | 75 | 85 | 105 | 130 | 180 | 250 | 330 | 280 | 350 | 600 |
| Dry weight capacity, kg/lb | 8/18 | 9/20 | 11/25 | 14/30 | 20/45 | 28/62 | 35/75 | 28/62 | 35/77 | 65/145 |
| Extraction, rpm (N/S) | 587/830 | 587/830 | 548/776 | 548/776 | 525/742 | 497/702 | 474/641 | | | |
| Extraction, rpm (X) | | | | | | | | 805 | 650 | 650 |
| G-factor (N/S) | 100/200 | 100/200 | 100/200 | 100/200 | 100/200 | 100/200 | 100/200 | | | |
| G-factor (X) | | | | | | | | 300 | 220 | 220 |
| Width, mm | 660 | 660 | 720 | 720 | 750 | 830 | 910 | 933 | 1115 | 1173 |
| Depth, mm | 681 | 722 | 697 | 787 | 914 | 1029 | 1114 | 985 | 1121 | 1193 |
| Height, mm | 1131 | 1133 | 1217 | 1216 | 1345 | 1426 | 1465 | 1456 | 1570 | 1673 |
| Width, in | 26* | 26* | 28 3/8* | 28 3/8* | 29 1/2* | 32 11/16* | 35 13/16* | 36 3/4* | 43 7/8* | 46 3/16* |
| Depth, in | 26 13/16* | 28 7/16* | 27 7/16* | 31* | 36* | 40 1/2* | 43 7/8* | 38 3/4* | 44 1/8* | 46 15/16* |
| Height, in | 44 1/2* | 44 5/8* | 47 15/16* | 47 7/8* | 52 15/16* | 56 1/8* | 57 11/16* | 57 5/16* | 61 13/16* | 65 7/8* |
| Electric / Steam / Non-heated | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x | x / x / x | - / x / x | x / x / x | x / x / x |
| Compass Pro* | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Clarus Control* (S/X) * | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control* are designed with horizontal wave and meet the specifications of Generation 4000.


- standard ○ option
- x available - not available



Washer Extractors Soft Mount
H High Spin Range

| | W4400H | W4600H | W4850H | W41100H |
|--------------------------------|--------------|--------------|--------------|--------------|
| Drum volume, l | 400 | 600 | 850 | 1100 |
| Dry weight capacity, kg/lb | 45/100 | 65/145 | 90/200 | 120/265 |
| Extraction, rpm | 825 | 800 | 720 | 663 |
| G-factor | 350 | 350 | 350 | 300 |
| Water consumption cold/hot, l* | programmable | programmable | programmable | programmable |
| Width, mm | 1325 | 1390 | 1640 | 1640 |
| Depth, mm | 1450 | 1585 | 1635 | 1850 |
| Height, mm | 1975 | 1975 | 2190 | 2190 |
| Width, in | 52 3/16" | 54 12/16" | 64 9/16" | 64 9/16" |
| Depth, in | 57 1/16" | 62 1/2" | 64 3/8" | 72 13/16" |
| Height, in | 77 3/4" | 77 3/4" | 86 1/4" | 86 1/4" |
| Electric/ Steam/ Non-heated | x/x/x | x/x/x | -/x/x | -/x/x |
| Clarus Control* | ● | ● | ● | ● |
| Wet-cleaning Excellence | ○ | - | - | - |

* Consumption data: Normal 60 °C (140 °F) program (without pre-wash, 3 rinses at rated capacity electrical heating)

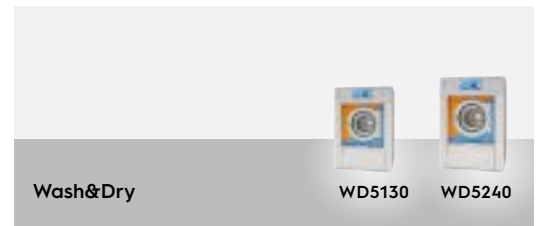

Wash&Dry

| | WD5130 | WD5240 |
|---------------------------------|-----------|----------|
| Drum volume, l | 130 | 240 |
| Dry weight capacity, kg/ lb | 8/18 | 15/33 |
| Extraction, rpm | 980 | 980 |
| G-factor | 350 | 350 |
| Water consumption cold/ hot, l* | 48/ 12 | 82/ 22 |
| Electric/ Electric | ● | ● |
| Width, mm | 910 | 1020 |
| Depth, mm | 1110 | 1350 |
| Height, mm | 1330 | 1450 |
| Width, in | 35 13/16" | 40 3/16" |
| Depth, in | 43 11/16" | 53 1/8" |
| Height, in | 52 3/8" | 57 1/16" |
| Electric/ Gas | ○ | ○ |
| Non-heated / Gas or Electric | ○ | ○ |
| Compass Pro* | ● | ● |
| Wet-cleaning Excellence | - | ○ |

* Consumption data: Normal 60 °C (140 °F) program



Washer Extractors Soft Mount
Barrier Washer Extractors

| | WSB5180H | WSB5250H | WSB5350H | WS4500H | WP4700H | WP4900H | WP41100H |
|--|----------|----------|----------|---------|----------|----------|----------|
| Drum volume, l | 180 | 250 | 350 | 500 | 690 | 890 | 1080 |
| Dry weight capacity, kg/ lb | 18/40 | 25/55 | 35/77 | 50/110 | 70/154 | 90/198 | 110/242 |
| Extraction, rpm | 910 | 910 | 910 | 910 | 910 | 720 | 720 |
| G-factor | 350 | 350 | 350 | 350 | 350 | 300 | 300 |
| Width, mm | 895 | 1050 | 1270 | 1565 | 1496 | 1726 | 1956 |
| Depth, mm | 1040 | 1050 | 1060 | 980 | 1363 | 1363 | 1363 |
| Height, mm | 1620 | 1620 | 1620 | 1610 | 2040 | 2040 | 2040 |
| Width, in | 35 1/4 | 41 5/16 | 50 | 61 5/8 | 58 7/8 | 67 15/16 | 77 |
| Depth, in | 40 15/16 | 41 5/16 | 41 3/4 | 38 9/16 | 53 11/16 | 53 11/16 | 53 11/16 |
| Height, in | 63 3/4 | 63 3/4 | 63 3/4 | 63 3/8 | 80 5/16 | 80 5/16 | 80 5/16 |
| Electric/ Steam/ Gas/ Thermal Oil | x/x/x/- | x/x/x/- | x/x/x/- | x/x/x/x | x/x/-/x | x/x/-/x | x/x/-/x |
| Water consumption (cold) litre El* / Gas | 165/185 | 230/250 | 322/342 | 610/638 | 990/- | 1190/- | 1490/- |
| Compass Pro* | ● | ● | ● | - | - | - | - |
| Clarus Control* | - | - | - | ● | - | - | - |
| Clarus TS* | - | - | - | - | ● | ● | ● |

* El or Steam

Tumble Dryers

Find the solution that meets your needs

● standard ○ option
x available - not available



| Tumble Dryers | T5130 | T5190 | T5190LE | T5250 | T5290 | T5350 | T5550 | T5675 | T4900 | T41200 |
|--|-----------|----------|----------|----------------|----------------|----------------|----------------|----------------|---------------|------------------|
| Drum volume, l | 130 | 190 | 190 | 250 | 290 | 349 | 550 | 675 | 900 | 1200 |
| Dry weight capacity, kg/lb | 6/13 | 10.6/23 | 10.6/23 | 13.9/30.7 | 16.1/35.5 | 19.4/42.8 | 30.5/67.2 | 37.5/82.7 | 50/110 | 66.7/147 |
| Width, mm | 597 | 721 | 722 | 790 | 713 | 790 | 961 | 961 | 1290 | 1290 |
| Depth, mm | 723 | 778 | 777 | 958 | 1210 | 1177 | 1365 | 1560 | 1295 | 1485 |
| Height, mm | 839 | 1114 | 1685 | 1770 | 1688 | 1770 | 1869 | 1857 | 2465 | 2465 |
| Width, in | 23 7/16" | 28 3/8" | 28 3/8" | 31 1/8" | 28 1/16" | 31 1/8" | 37 13/16" | 37 13/16" | 50 13/16" | 50 13/16" |
| Depth, in | 28 15/16" | 29 5/16" | 28 9/16" | 37 11/16" | 47 5/8" | 46 5/16" | 53 3/4" | 61 7/16" | 51" | 58 7/16" |
| Height, in | 33 7/16" | 44 1/2" | 66 5/16" | 69 11/16" | 66 7/16" | 69 11/16" | 73 9/16" | 73 1/8" | 97" | 97" |
| Electric/Gas/Steam | ●/-/- | ●/-/- | ●/-/- | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x |
| Energy kWh/l water evaporated* (Electric/Gas/Steam) | 0.94/-/- | 0.92/-/- | 0.38/-/- | 0.95/1.09/2.23 | 0.96/1.06/1.37 | 0.99/1.03/1.48 | 0.98/1.06/1.22 | 0.98/1.07/1.26 | 1.2/1.16/1.91 | 1.17**/1.23/1.64 |
| Selecta Control® | - | - | - | - | - | - | - | - | ● | ● |
| Compass Pro® | ● | ● | ● | ● | ● | ● | ● | ● | - | - |
| Residual Moisture Control | ● | ○ | ● | ○ | ○ | ○ | ○ | ○ | ● | ● |
| Reversing Drum Action | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ● | ● |
| Lagoon® Wet-cleaning Excellence | - | - | - | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Sliding door | - | - | - | - | - | - | - | - | ○ | ○ |

Front panel in stainless steel as option. More information on product data sheet.

* At rated capacity 100 % cotton load at 50 % initial moisture dried to 0 %

** Test load 48 kg / 100 lbs






Ironers

Discover which solution is best for you

● standard ○ option
x available - not available



| Ironers | IC43316 | IC43320 | IC44819 | IC44821 | IC44825 | IC44828 | IC44832 | IC44819 FFS | IC44825 FFS | IC44832 FFS |
|--|------------|------------|-----------|-----------|------------|------------|------------|-------------|-------------|-------------|
| Roll diameter mm/in | 325 / 13 | 325 / 13 | 479 / 19 | 479 / 19 | 479 / 19 | 479 / 19 | 479 / 19 | 479 / 19 | 479 / 19 | 479 / 19 |
| Ironing width mm/in | 1650 / 65 | 2065 / 81 | 1910 / 75 | 2120 / 83 | 2540 / 100 | 2750 / 108 | 3170 / 125 | 1910 / 75 | 2540 / 100 | 3170 / 125 |
| Width, mm | 2030 | 2445 | 2575 | 2785 | 3205 | 3205 | 3835 | 3555 | 4185 | 4815 |
| Depth, mm | 690 | 690 | 1070 | 1070 | 1070 | 1070 | 1070 | 1820 | 1820 | 1820 |
| Height, mm | 1145 | 1145 | 1270 | 1270 | 1270 | 1270 | 1270 | 1590 | 1590 | 1590 |
| Width, in | 79 15/16" | 96 1/4" | 101 3/8" | 109 5/8" | 126 3/16" | 126 3/16" | 151" | 139 15/16" | 164 3/4" | 189 9/16" |
| Depth, in | 27 3/16" | 27 3/16" | 42 1/8" | 42 1/8" | 42 1/8" | 42 1/8" | 42 1/8" | 71 5/8" | 71 5/8" | 71 5/8" |
| Height, in | 45 1/16" | 45 1/16" | 50" | 50" | 50" | 50" | 50" | 62 5/8" | 62 5/8" | 62 5/8" |
| Width, mm (with Feeding and Length Folding) | - | - | 2575 | 2785 | 3205 | 3205 | 3835 | - | - | - |
| Depth, mm (with Feeding and Length Folding) | - | - | 1280 | 1280 | 1280 | 1280 | 1280 | - | - | - |
| Height, mm (with Feeding and Length Folding) | - | - | 1460 | 1460 | 1460 | 1460 | 1460 | - | - | - |
| Width, in (with Feeding and Length Folding) | - | - | 101 3/8" | 109 5/8" | 126 3/16" | 126 3/16" | 151" | - | - | - |
| Depth, in (with Feeding and Length Folding) | - | - | 50 3/8" | 50 3/8" | 50 3/8" | 50 3/8" | 50 3/8" | - | - | - |
| Height, in (with Feeding and Length Folding) | - | - | 57 1/2" | 57 1/2" | 57 1/2" | 57 1/2" | 57 1/2" | - | - | - |
| Electric / Steam / Gas | x/x/- | x/x/- | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x | x/x/x |
| Evaporation capacity l/h | 19.5 | 24.5 | 38/57/35 | 40/63/37 | 48/75/46 | 51/81/51 | 59/93/59 | 38/57/35 | 48/75/46 | 59/93/59 |
| Speed m/minute | 0.5 to 5.5 | 0.5 to 5.5 | 1.5 to 9 | 1.5 to 9 | 1.5 to 9 | 1.5 to 9 | 1.5 to 9 | 1.5 to 11 | 1.5 to 11 | 1.5 to 11 |
| Ironer Moisture | ○ | ○ | ● | ● | ● | ● | ● | ● | ● | ● |
| Dubixium™* | - | - | ○ | ○ | ○ | ○ | ○ | ● | ● | ● |
| Automatic feeding | - | - | ○ | ○ | ○ | ○ | ○ | ● | ● | ● |
| Automatic folding | - | - | ○ | ○ | ○ | ○ | ○ | ● | ● | ● |

* For electric and gas heated versions



| Ironers | IB42310 | IB42314 | IB42316 |
|--------------------------|-----------|-----------|-----------|
| Roll diameter mm/in | 230 / 9 | 230 / 9 | 230 / 9 |
| Ironing width mm/in | 1000 / 39 | 1400 / 55 | 1650 / 64 |
| Width, mm | 1395 | 1795 | 2045 |
| Depth, mm | 510 | 510 | 510 |
| Height, mm | 1025 | 1025 | 1025 |
| Width, in | 54 15/16" | 70 11/16" | 80 8/16" |
| Depth, in | 20 1/16" | 20 1/16" | 20 1/16" |
| Height, in | 40 6/16" | 40 6/16" | 40 6/16" |
| Electric | x | x | x |
| Evaporation capacity l/h | 5 | 6,5 | 8,1 |
| Speed m/minute | 1 to 4 | 1 to 4 | 1 to 4 |



| Ironers | C-Flex 900 | C-Flex 1200 |
|---------------------------------------|-----------------------------------|----------------------------------|
| Roll diameter mm/in | 900 / 35 | 1200 / 47 |
| Ironing width mm/in | 2700 to 4200 / 118 to 165 | 2700 to 4200 / 118 to 165 |
| Width x Depth x Height (1 roll), mm* | 4500 x 1685 x 1560 | 4500 x 1985 x 1760 |
| Width x Depth x Height (2 rolls), mm* | 4500 x 2955 x 1560 | 4500 x 3555 x 1760 |
| Width x Depth x Height (3 rolls), mm* | 4500 x 4225 x 1560 | 4500 x 5125 x 1760 |
| Width x Depth x Height (1 roll), in | 165 6/16" x 78 9/16" x 61 7/16" | 165 6/16" x 91 5/16" x 69 5/16" |
| Width x Depth x Height (2 rolls), in | 165 6/16" x 130 14/16" x 61 7/16" | 165 6/16" x 157 5/16" x 69 5/16" |
| Width x Depth x Height (3 rolls), in | 165 6/16" x 183 11/16" x 61 7/16" | 165 6/16" x 219 2/16" x 69 5/16" |
| Steam/Gas/Thermal Oil | x/x/x | x/x/x |
| Evaporation capacity l/h | 189 to 731 | 230 to 1260 |
| Number of rolls | 1 to 3 | 1 to 3 |
| Speed m/minute | 5 to 50 | 5 to 50 |

* For 3.3 m working width models



Save time and human resources

One compact machine that can process your flatwork with one operator

Feeding, Folding and Stacking are all performed automatically.

Full Automatic Folding

- ▶ Automatically measures each item for perfect fold

Full Automatic Feeding

- ▶ Finish your largest items with only one operator!

Full Automatic Stacking

- ▶ Perfect piles, ready to be stored in your trolleys

Finishing equipment

Finishing solutions that meet your needs

Tables



FIT1 Folding Table
with manual boiler (2 hours) + iron



FIT2B Vacuum Ironing Table
with integrated automatic boiler



FIT1-WC Vacuum/Blowing Table
(left ended) without boiler

Finisher



FSF2 Blowing Shirt Finisher
FSF3 Pressing Shirt Finisher



FFT-WC Jacket Multi-form Finisher



FTT2 Trousers Topper

Spotting units



FSU3 Pre-Spotting Portable Table



FSU4 Pre-Spotting and Pre-Brushing Cabinet
with vacuum

Boiler



FSB24C Boiler 24 kW
with condensate collecting tank

This is a selection of the key finishing products. A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available, ask our local offices!

Presses



FPA6-WC Collar and Cuff Press



FPA1-WC Automatic Laundry Press with universal shape



FPA3-WC Automatic Laundry Mushroom Press



FPA1-D Automatic Cleaning Press with universal shape

Fin Cabinet



FC48 Finishing Cabinet 8 hangers

Marking Machine



Y150 Marking Machine

Unique Service Excellence

Always near.
Always there for you

A reliable, global presence: Electrolux Professional offers the most extensive service network of skilled, authorised partners for daily tasks: installation, spare parts and maintenance. All of them provide an efficient customer service and fast technical assistance. A global service network for prompt, expert advice worldwide.

- ▶ 1,900 authorised service centres
- ▶ Over 7,000 expert technicians
- ▶ 44,000 available spare parts in stock
- ▶ Spare parts available for at least 10 years from the end of production
- ▶ 24-48 hr spare parts delivery worldwide



Electrolux

Electrolux Professional Hospitality Laundry

In-House Laundry Solutions

Consumer Operated Laundry Solutions

Commercial Laundry Solutions

Hygiene Laundry Solutions



Excellence with the environment in mind

Electrolux Professional solutions perfectly match the customers' needs, including the areas of reliability, cost efficiency and sustainability. The products are the best in terms of quality - durability with low running costs. Some installations have been running for more than 40 years!

- ▶ All Electrolux factories are ISO 14001-certified
- ▶ All Electrolux Professional products are designed for low water, energy and detergent consumption, and for low emissions into the environment
- ▶ All Electrolux Professional products are ROHS-compliant and over 95 % recyclable
- ▶ All units are quality tested, piece by piece, and all of the functions are singularly checked by expert technicians
- ▶ In the last five years, more than 70% of Electrolux Professional solutions have been updated with features that are always designed with the needs of customers and environmental considerations in mind



**Discover the Electrolux Excellence
and share more of our thinking at
www.electrolux.com/professional**